



KONICA MINOLTA

UNIFIED CONNECTIVITY

A3 Monochrome bizhub 754e / 654e



bizhub 754e / 654e



Scan the QR code For
Online experience

Giving Shape to Ideas



A POWERFUL SOLUTION FOR HIGH-VOLUME OFFICE PRINTING

> Fast

Education, public sector, healthcare and legal are among the most document-intensive industries and enterprise in these industries acquire and handle large volumes of information. Due to the nature of their operations, a major part of this information eventually ends up as documents.

Digital documents that can be quickly distributed can optimise workflow and business processes in these industries.

The new bizhub 754e / 654e series is designed for high-speed, high-volume, black-and-white printing, and come packed with capabilities. These capabilities enable enterprises to integrate print management and workflow with existing business applications. Print and scan faster and more easily, saving time so that you can spend on more useful tasks. Functionalities such as mobile printing and connectivity to cloud services will give you total independence.

The new series holds the promise of improved workflow, optimised business processes, higher efficiency and productivity, and an informed and enabled workforce.

The bizhub 754e / 654e series delivers shorter warm-up and first copy out times. High-speed scanning (90 opm for simplex documents, 180 opm for duplex documents) and high output volume (75 ppm for the 754e, 65 ppm for the 654e) allow quick processing of booklets and aggregated copying and printing.


► Productive

The bizhub 754e / 654e series comes with Konica Minolta's IWS (Internal Web Server) technology. The technology, which leverages web standards like HTML5, Java script, CSS and other web technologies, makes it possible for users to fully reconfigure the control panel according to their wishes and needs.

Using IWS, users can also quickly develop lightweight applications and also connectors to complement the bizhubs' core functions. These applications and connectors are easily accessible from the bizhub touchscreen control panel and run on an embedded web browser; no external servers are required. With bizhub Connectors, users can scan to or print from Microsoft SharePoint Servers 2007 / 2010, Gmail and Google Drive or Evernote from MFP control panel.

In addition, mobile users can use the PageScope Mobile app to print from iOS and Android devices. Other functions supported by IWS include scan to cloud and printing of documents stored in the cloud.

The bizhub 754e / 654e is equipped with a high-performance colour scanner. Paper documents can be scanned and converted to PDF files or Office OpenXML format files. In addition, OCR processing converts hardcopy text into files with digitised text.

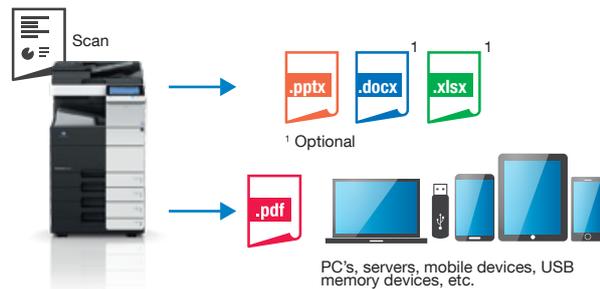

Top screen

Customised example

Customisable user-friendly control panel

The control panel's shortcut and function keys can be customised to limit the use of functions and simplify operations. Up to 23 shortcut keys can be set in the main menu for quick access to frequently used functions. Function key displays can also be changed according to department or user.

BUILT WITH EARTH IN MIND

► Green

The bizhub 754e / 654e promotes corporate environmental conservation activities with a low environmental impact design. Recycled materials¹ are effectively utilised for 27.4 percent of the main unit's surface area, including recycled PC / PET and recycled PC / ABS in 23 locations and biomass plastic.

Eco indicator

Customers can view their "eco contribution levels" for toner and paper saving which are indicated in 10 steps on the Eco Meter. Cumulative power usage can also be displayed.

¹ Includes a mixture of PCR (Post Consumer Recycled) materials recovered and recycled from consumers.

Low power consumption even during use

The bizhub 754e / 654e series easily clears the new Energy Star standard TEC values. The energy-saving design also reduces TCO.

TEC VALUE COMPARISONS



* Values for 220-240 V

* TEC values applied to the International Energy Star Program Version 2.0



> Secure

Engineered to meet international security standards, the bizhub 754e / 654e series offers users a comprehensive array of standard safeguards that allow them to maintain information and document security.



Prevent information leakage

Enterprises using the bizhub 754e / 654e series can protect valuable information without sacrificing convenience with a variety of authentication systems. These include server-free MFP authentication, IC card authentication using employee ID or magnetic stripe cards, and biometric authentication. External server authentication and IC card authentication

are also supported.

ISO 15408 EAL3 (IEEE 2600.1 Complaint)²

IEEE 2600 is an international standard for MFP and printer information security. It is classified into four levels depending on the requested security environment. Among the four levels, IEEE 2600.1 defines the functional requirements for environments that demand the highest level of security (such as the military and government). The bizhub 754e / 654e series achieves an unparalleled level of security by complying with IEEE 2600.1.

Access control and encryption communication functions, as well as high level security functions such as software verification function for ensuring validity of the software can be installed, information deletion function to prevent residual information leaks, security management function through the administrator, and audit function for viewing security-related logs.

² Under evaluation

POWERFUL FINISHING OPTIONS

> Flexible

The main unit's standard paper trays hold up to 3,650 sheets. Combined with optional paper feeding units, the bizhub 754e / 654e series offers a maximum paper capacity of 6,650 sheets. To maximise productivity even further, paper and toner can be replenished on the fly. Both models can also accommodate large SRA3 paper (320 x 450 mm).



Finishing accessories include staple finishers for booklet-making, 2/3 hole-punching, and folding in multiple patterns.

Max. paper capacity: 6,650 sheets (80 g/m²)
with optional Large Capacity Unit LU-301 installed

Supported paper:
52 to 256 g/m² (standard tray)
52 to 256 g/m² (large capacity unit)
52 to 300 g/m² (multiple bypass tray)

Post inserter for a variety of outputs

Install Post Inserter PI-505 to Finisher FS-535 for inserting colour output paper as covers or dividers for creating booklets. The Post Inserter's control panel can also be manually set for post-processing of printed documents.

Post-processing jobs include:

Stapling (corner, two-point), Centre-folding¹, tri-folding¹, hole punching¹

¹ With options installed





Maximum output of 3,000 sheets

Tray 2 for Finishers FS-534 and FS-535 can be automatically adjusted according to the amount of discharged paper, providing a maximum capacity for 3,000 A4 sheets or 1,500 B4 and A3 sheets.


* A4 paper capacity with the saddle stitcher installed:
FS-534: 2,000 sheets, FS-535: 2,500 sheets

EMPOWER YOUR BUSINESS WITH CENTRALISED MANAGEMENT OF ACCOUNTING, AUTHENTICATION AND DEVICE INFORMATION

PAGE SCOPE Enterprise Suite

PageScope Enterprise Suite (PSES) provides the solutions to empower your business by offering centralised management of accounting, authentication and device information. PageScope Enterprise Suite is the collective term for diverse applications required for the performance of tasks such as management of aggregation and authorisation of devices operating in the office, user-specific panel settings and control and follow-me printing.

The Web-based PSES includes Account Manager, Authentication Manager, My Panel Manager, Net Care Device Manager and My Print Manager, and systematically links applications, integrating and sharing them seamlessly on one server. This results in much easier operation and better-integrated management.

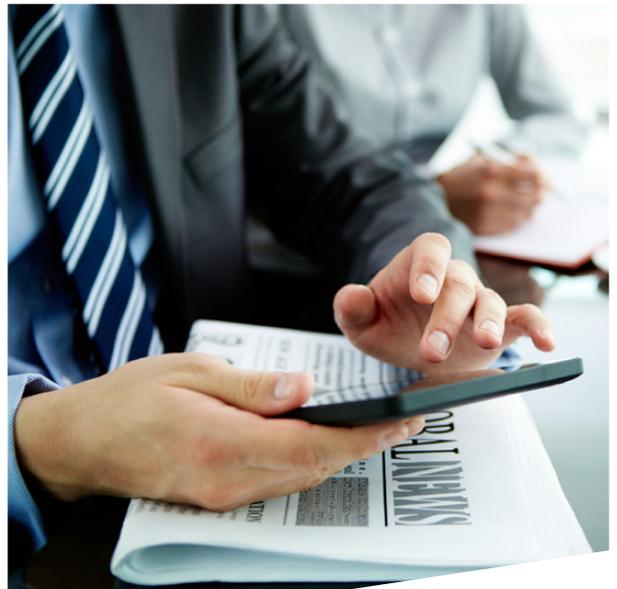

Net Care Device Manager



Account Manager



Authentication Manager



My Panel Manager



My Print Manager



Click the Copy screen



INFO-Palette

User interface designed with the user in mind

The bizhub 754e / 654e adopt the INFO-Palette design smart user interface, providing the same user experience through seamless operation even from PCs, tablets and smartphones.

The user interface further enhances ease of use with intuitive mobile device-like tap, flick & pinch operation.

bizhub 754e



Black & White:
75 ppm

MAX Monthly Volume:
215,000 pages

MAX Paper Capacity:
6,650 sheets

Standard Dual Scanning:
180 opm

Print Resolution:
1800x600 dpi
1200x1200 dpi

Key Features:

High-speed 75 ppm B&W print / copy output makes you more productive

Dual scanning at up to 180 opm brings information into your workflow faster

Built-in Emperon print system with PCL6 / PS3 emulation, native XPS

Large 9" colour display on the bizhub 754e printer, copier and scanner makes it as simple to operate as a familiar tablet

Transparent menus, customisable icons, intuitive soft keyboards

Multi-touch functions: swipe, drag, double-tap, rotate, flick & pinch

Customisable applications and bizhub connectors



^{*1} Optional

bizhub 654e

Black & White:
65 ppm

MAX Monthly Volume:
187,000 pages

MAX Paper Capacity:
6,650 sheets

Standard Dual Scanning:
180 opm

Print Resolution:
1800x600 dpi
1200x1200 dpi



Key Features:

High-speed 65 ppm B&W print / copy output makes you more productive

Dual scanning at up to 180 opm brings information into your workflow faster

Built-in Emperon print system with PCL6 / PS3 emulation, native XPS

Large 9" colour display on the bizhub 645e printer, copier and scanner makes it as simple to operate as a familiar tablet


Multi-touch functions: swipe, drag, double-tap, rotate, flick & pinch

Transparent menus, customisable icons, intuitive soft keyboards


Customisable applications and bizhub connectors




*1 Optional

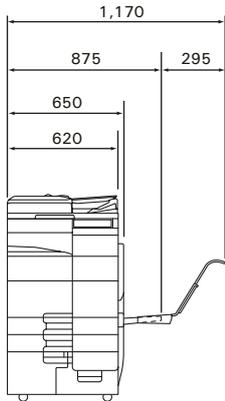


Front View
bizhub 754e/654e+MK-715

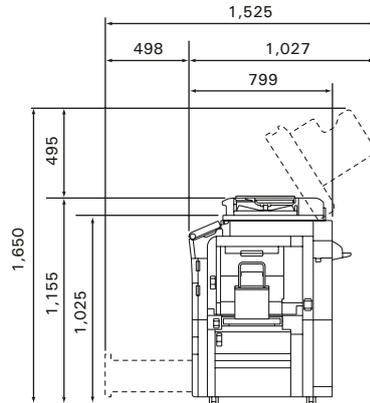


Side View
bizhub 754e/654e+MK-715

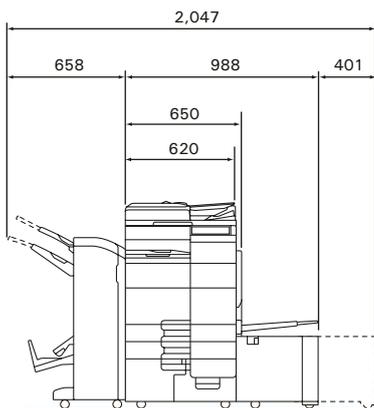


Front View
bizhub 754e/654e+FS-534+SD-511
+LU-301

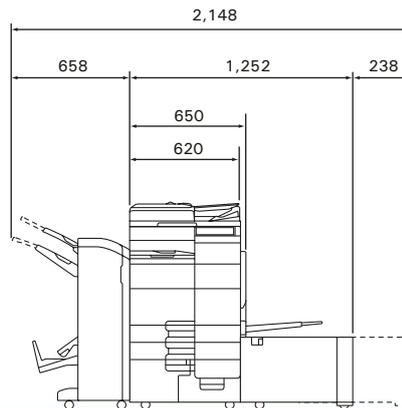


Front View
bizhub 754e/654e+FS-534+SD-511
+LU-204

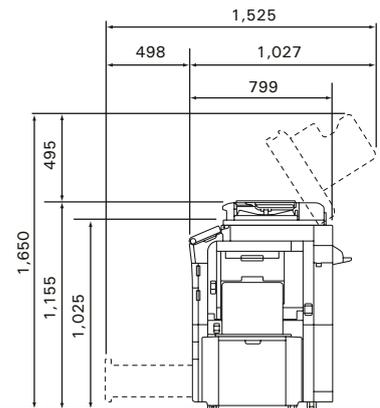


Side View
bizhub 754e/654e+FS-534+SD-511
+LU-204/LU-301

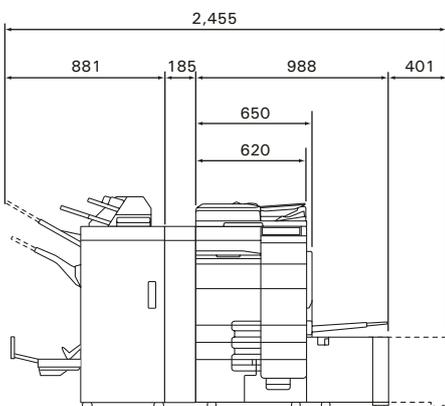

Front View
bizhub 754e/654e+FS-535+SD-512
+ZU-606+PI-505+LU-301

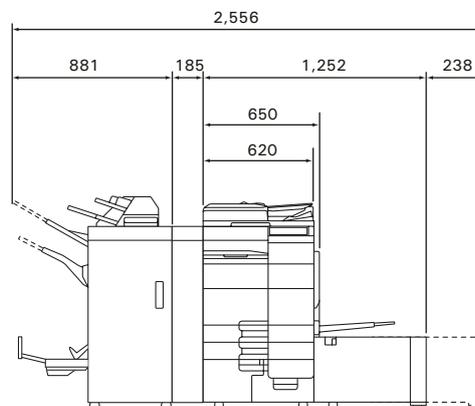

Front View
bizhub 754e/654e+FS-535+SD-512
+ZU-606+PI-505+LU-204

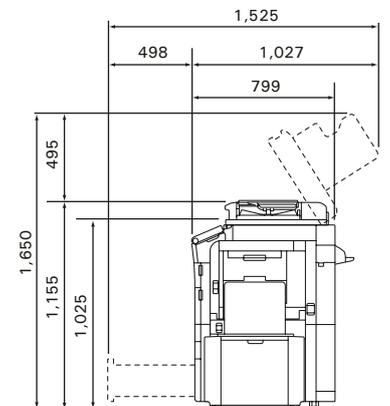

Side View
bizhub 754e/654e+FS-535+SD-512
+ZU-606+PI-505+LU-204/LU-301

Job Separator JS-602*
When attached to the FS-535, this becomes the fax/print/copy output separator tray.

*PI-505 and JS-602 cannot be installed at the same time.

Post Inserter PI-505*
When attached to Finisher FS-535, allows you to add white paper cover sheet/inter sheet, and operate the Finisher manually.



Finisher FS-535
A high-performance finisher that allows you to multi-staple up to 100 sheets.

Z Folding Unit ZU-606
Includes Z-folding function and hole punching function.

Punch Kit PK-521
Attaches to Finisher FS-535 for hole punching capability. (paper up to 300 g/m² thick)

Saddle Stitcher SD-512
Attaches to Finisher FS-535 for saddle stitching, half folding and tri-folding jobs.

Staples MS-10A
* for FS-535

Staple Kit SK-602
* for SD-512

Output Tray OT-503

Finisher FS-534
A small, low-noise and high-performance finisher that allows you to multi-staple up to 50 sheets.

Punch Kit PK-520
Attaches to Finisher FS-534 for hole punching capability (paper up to 300 g/m² thick)

Saddle Stitcher SD-511
Attaches to Finisher FS-534 for saddle stitching, half folding and tri-folding jobs.

Staple Kit SK-602
* for FS-534, SD-511

Upgrade kit UK-204
2 GB memory

i-Option LK-101 v3
Web browse function

i-Option LK-102 v3
Encrypted PDF or PDF/A (1a/1b)

i-Option LK-104 v3
Voice guidance
* Local Interface Kit EK-604 or EK-605 is required.

i-Option LK-105 v3
Searchable PDF

Keypad KP-101

Keyboard Holder KH-102

Security Kit SC-508
* Two SC-508 are required.

Fax Kit FK-511
For 1st / 2nd line
*1st line : 1 x FK-511
*2nd line : 2 x FK-511

Stamp Unit SP-501

i-Option LK-106
Barcode font (Code39, QR Code, PDF417)

i-Option LK-107
Unicode font

i-Option LK-108
OCR font (OCR-A, OCR-B (PCL))

i-Option LK-110
File format extension package
** LK-102 and LK-105 are not required with use of LK-110

bizhub Connector S-1/G-1/E-1
* LK-101 v3 is required.

i-Option LK-111
ThinPrint function

USB HUB Kit EK-604

USB HUB Kit EK-605

Working Table WT-509
For Upright Panel

Working Table WT-506

Authentication Unit AU-102*
Biometric type
* WT-506 or WT-509 or MK-735 is required.

Authentication Unit AU-201*
IC card type
* WT-506 or WT-509 or MK-735 is required.

Mount Kit MK-735
For IC card authentication unit installation
Built into front panel

Banner Paper Setting Guide MK-715
Used for banner printing.

Large Capacity Unit LU-204
Increases the bizhub's paper capacity by 2,500 sheets for paper up to SRA3 size and 80g/m² thick.



Large Capacity Unit LU-301
Increases the bizhub's paper capacity by 3,000 sheets for paper up to A4 size and 80g/m² thick.



Note: Some options are not listed.

OR One of the options may be selected (not mandatory).

✓ One of the options must be selected (mandatory).

SPECIFICATIONS

bizhub 754e/654e General Specifications

Type	Console Printer / Copier / Scanner	
Copy Resolution	Scan	Main: 600 dpi Sub: 600 dpi
	Print	1,800 dpi (equivalent) x 600 dpi
Gradation	256	
Memory Capacity (Std./Max.)	2GB/4GB	
HDD	250GB	
Original Type	Sheets, Books, Objects	
Max. Original Size	A3 (11" x 17")	
Output Size	SRA3 to A5, B6S ¹ , A6S ¹ Thick paper, Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K, Long Length Paper (210 x 457.3 mm to 297 x 1,200 mm)	
Image Loss	Max. 4.2 mm or less for top edge (5 mm for thin paper), Max. 3.0 mm or less for bottom edge, Max. 3.0 mm or less for right/left edges *A loss of 4.2 mm each during printing.	
Warm-Up Time (23°C, std. voltage) (May vary depending on the operating environment and usage.)	22 sec. or less (The time required to start printing when both the main power and sub-switch switches are turned from OFF to ON.)	
	22 sec. or less (The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.)	
First Copy Time ³	754e : 3.6 sec. or less 654e : 3.7 sec. or less	
Copy Speed (A4 Crosswise)	754e : 75 ppm 654e : 65 ppm	
Copy Magnification	Fixed Same Magnification	1:1±0.5% or less
	Scaling Up	1: 1.154/1.224/1.414/2.000
	Scaling Down	1: 0.866/0.816/0.707/0.500
	Preset	3 types
	Zoom	25 to 400% (in 0.1% increments)
	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)
Paper Capacity (80 g/m)	Individual Settings	500 sheets (up to SRA3)
	Tray 3	1,500 sheets (A4)
	Tray 4	1,000 sheets (A4)
	Multiple Bypass Tray	150 sheets (up to SRA3)
Max. Paper Capacity (80 g/m ²)	6,650 sheets	
Paper Weight	Tray 14	52 to 256 g/m ²
	Multiple Bypass Tray	52 to 300 g/m ²
Multiple Copy	1 to 9,999 sheets	
Auto Duplex	Type	Non-Stack
	Paper Size	Width: 100 to 320 mm, Length: 148 to 457.2 mm
	Paper Weight	52 to 256 g/m ²
Power Requirements	AC 230 V 10 A (50 to 60Hz)	
Max. Power Consumption	2.1 kW or less	
Dimensions [W] x [D] x [H]	650 mm x 799 mm x 1,155 mm (25-1/2" x 31-1/2" x 45-1/2")	
Weight	Approx. 201 kg (443-1/4 lb)	
Space Requirements ⁴ [W] x [D]	988 x 1,525 mm (39" x 60")	

¹ S: Short edge feed Set by Customer engineer

² A4 crosswise full size/using the 1st tray/scanning from the original glass surface.

⁴ Without options, with paper trays pulled out, and multiple bypass tray, auxiliary tray and ADF opened.

Printer Specifications

Type	Embedded	
CPU	MPC8536 1.2 GHz	
Memory	Shared with the copier	
Print Speed	Same as Copy Speed (when using the same original)	
HDD	250 GB (Shared with the copier)	
Print Resolution	1,800 dpi (equivalent) x 600 dpi (at smoothing) or 1,200 dpi x 1,200 dpi (in 1,200 dpi mode)	
PDL	PCL5e/c Emulation, PCL6 (XL Ver. 3.0) Emulation, PostScript 3 Emulation (3016), XPS Ver. 1.0	
Protocol	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), LPD, IPP1.1, SNMP, HTTP	
Support OS	Windows XP / XP x64 / Vista / Vista x64 / 7 / 7 x64 / 8 / 8 x64 Windows Server 2003 / 2003 R2 / Windows Server 2008 / 2008 R2 x64 / 2012 x64 Mac OS9.2, OS X 10.2 / 10.3 / 10.4 / 10.5 (PowerPC) Mac OS X 10.5 / 10.6 / 10.7 / 10.8 (Intel), Linux	
Fonts	PCL	80 Roman fonts
	PS	137 Roman Type1 fonts
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, USB Host	

Scanning Function Specifications

Type	Full-Colour Scanner	
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)	
Driver	TWAIN Driver, HDD TWAIN Driver	
Protocol	TCP/IP (FTP, SMB, SMTP, WebDAV) (IPv4/IPv6)	
Scanning Speed Colour/B&W (400dpi, A4 Crosswise)	Simplex: 90 opm Duplex: 180 opm	
Scanning Size	Max. A3 (11x17")	
Output Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, OOXML (pptx, xlsx*, docx*), Searchable PDF*, PDF/A, Linearised PDF *Optional	
Scanning Resolution	Push	200 dpi / 300 dpi / 400 dpi / 600 dpi
	Pull	100 dpi / 200 dpi / 300 dpi / 400 dpi / 600 dpi
Main Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to Me, Scan to Home, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Pro le for Web Services (DPWS)	
Other Functions	Multi-Method Send, Authentication at the time of E-Mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation	

Internet Fax

Protocol	SMTP, POP
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour Internet Fax
Format	Send: TIFF-F, Receive: TIFF-F Colour/Grey Scale: TIFF (RFC3949 Pro le-C)


Fax Kit FK-511 (Optional)

Communication	Super G3
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line
Line Density	G3 (8 dot/mm x 3.85 line/mm, 600 x 600 dpi)
Modern Speed	2.4 to 33.6 kbps
Compression	MH/MR/MMR/JBIG
Sending Paper Size	Max. A3 (Long Length Support: Max. 1,000 mm)
Recording Paper Size	Max. A3 (Long Length Max. 1,000 mm — following the page division —)
Transmission Speed	Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG)
Memory	Shared with the copier
Number of Abbr. Dials	2,000
Number of Program Dials	400
Number of Group Dials	100
Sequential Multiple Station Transmission	Max. 600

IP Address Fax (Optional) *Optional Fax Kit FK-511 is required.

Protocol Transmission	SMTP
Sending Paper Size	A3, B4, A4
Resolution	200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Format	Send: TIFF-F, Receive: TIFF-F Colour/Grey Scale: TIFF (RFC3949 Pro le-C)

Finisher FS-535 (Optional)



Type	Finisher
Support Paper Type	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Long length paper, Tab paper
Support Paper Size	SRA3 to A5, B6S ¹ , A6S ¹ Thick paper, Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K, Long Length Paper (210 x 457.3 mm to 297 x 1,200 mm)
Mode	Sort, Group, Offset Sort, Offset Group, Staple
Stacking Capacity	Output tray 1 (Sub tray) 200 sheets (60 to 90 g/m ²) 50 sheets (52 to 59 g/m ²) 20 sheets (91 to 300 g/m ² , special paper) Output tray 2 (Main tray) 3,000 sheets (52 to 90 g/m ²) *2,500 sheets when SD-512 is installed 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5S ³ or smaller) 100 sheets (91 to 300 g/m ²)
Staple Capacity	Max. 100 sheets (52 to 90 g/m ²)
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	77 W or less
Dimensions [W] x [D] x [H]	724 x 709.5 x 1,025 mm (28-1/2" x 28" x 40-1/2")
Weight	Approx. 63.5 kg (140 lb)

¹ S: Short edge feed Set by Customer engineer

Saddle Sticher SD-512 (Optional)



Applicable	Finisher FS-535
Support Paper Type	Centre Staple: 52 to 90 g/m ² Half-Fold: 52 to 209 g/m ² (more than 91 g/m ² Thick paper can be used only as a cover page) Tri-Fold: 52 to 90 g/m ²
Support Paper Size	Centre Staple and Fold, Half-Fold: A3 Wide, A3, B4, A4S ¹ , 12-1/4" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 8K Tri-Fold: A4S1, 8-1/2" x 11S1, 16KS1
Maximum Number of Sheets that can be Centrestapled	20 (52 to 90 g/m ²) sheets, or 19 (90 g/m ²) sheets + Thick (209 g/m ²) 1 sheet
Maximum Number of Folded Sheets	Half-Fold: 5 sheets or Thick paper (91 to 209g/m ²) 1 sheet, Tri-Fold: 3 sheets
Stacking Capacity	1 to 5 sheets: 35 sets 6 to 10 sheets: 25 sets (paper length: 330 mm or less), 30 sets (paper length: over 330 mm) 11 to 20 sheets: 15 sets Tri-Fold (1 sheet): 50 sets, Tri-Fold (2 sheets): 40 sets, Tri-Fold (3 sheets): 30 sets
Power Requirements	Supplied from Finisher FS-535
Max. Power Consumption	31 W or less
Dimensions [W] x [D] x [H]	239 x 579 x 534mm (9-1/2" x 22-3/4" x 21")
Weight	Approx. 25.5 kg (56-1/4 lb)

¹ S: Short edge feed

Punch Kit PK-521 (Optional)



Applicable	Finisher FS-535
Number of holes	2 holes or 4 holes
Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90g/m ²), Thick paper (91 to 300g/m ²)
Support Paper Size	A3, B4, A4, B5 (Excluding 52 to 59 g/m ² B5S ¹), A5, Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K
Power Requirements	Supplied from Finisher FS-535
Max. Power Consumption	17 W or less
Dimensions [W] x [D] x [H]	146.2 x 639.2 x 233.8mm (5-3/4" x 25-1/4" x 9-1/4")
Weight	Approx. 4.5 kg (10 lb)

¹ S: Short edge feed Set by Customer engineer

Post Inserter PI-505 (Optional)



Applicable	Finisher FS-535
Support Paper Type (Weight)	Plain paper (60 to 90 g/m ²) Thick paper (91 to 209 g/m ²)
Support Paper Size	Upper Tray A4, B5, A5 Crosswise, 8-1/2" x 11", 7-1/4" x 10-1/2", 5-1/2" x 8-1/2" Crosswise, 16K Lower Tray A3 Wide, A3, B4, A4, B5, A5 Crosswise, Foolscap ¹ (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 12" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 10-1/2" x 8", 7-1/4" x 10-1/2", 5-1/2" x 8-1/2" Crosswise, 8K, 16K
Paper Capacity	200 sheets (Plain paper, 80g/m ²)
Power Requirements	Supplied from Finisher FS-535
Max. Power Consumption	30 W or less
Dimensions [W] x [D] x [H]	511 x 635 x 220 mm (20-1/4" x 25" x 8-3/4")
Weight	Approx. 10.5 kg (23-1/4 lb)

¹ Set by Customer engineer


Job Separator JS-602 (Optional)



Applicable	Finisher FS-535
Support Paper Type (Weight)	Plain paper (60 to 90 g/m ²)
Support Paper Size	A3, B4, A4, B5, A5S ¹ , Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 10-1/2" x 8", 7-1/4" x 10-1/2", 5-1/2" x 8-1/2" S1, 8K, 16K
Power Requirements	Supplied from Finisher FS-535
Max. Power Consumption	5 W or less
Dimensions [W] x [D] x [H]	341 x 537 x 149 mm (13-1/2" x 21-1/4" x 5-3/4")
Weight	Approx. 1.75 kg (3-3/4 lb)

¹ S: Short edge feed Set by Customer engineer

Z Folding Unit ZU-606 (Optional)



Applicable	Finisher FS-535
Punch Holes	2 holes or 4 holes
Punch Paper Weight	60 to 90 g/m ²
Punch Paper Size	2 holes: A3, B4, A4S ¹ , B5, A5, 8K, 16K, Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13") 4 holes: A3, B4, A4 Crosswise, 8K, 16K Crosswise
Z Fold Paper Size	A3, B4, 8K
Z Fold Paper Weight	60 to 90 g/m ²
Power Requirements	AC100 to 240 V
Max. Power Consumption	120 W or less
Dimensions [W] x [D] x [H]	169 x 1,028 x 660 mm (6-3/4" x 40-1/2" x 26")
Weight	Approx. 45 kg (99-1/4 lb)

¹ S: Short edge feed Set by Customer engineer

Finisher FS-534 (Optional)



Type	Finisher
Support Paper Type	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 300g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Long length paper, Tab paper
Support Paper Size	SRA3 to A5, B6S ¹ , A6S ¹ Thick paper, Foolscap ² (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K, Long Length Paper (210 x 457.3 mm to 297 x 1,200 mm)
Mode	Sort, Group, Offset Sort, Offset Group, Staple
Stacking Capacity	Output tray 1 (Sub tray) 200 sheets (52 to 90 g/m ²) 20 sheets (91 to 300 g/m ² , special paper) Output tray 2 (Main tray) 3,000 sheets (52 to 90 g/m ² , A4S ¹ or smaller, B5 or larger) *2,000 sheets when SD-511 is installed 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 300 g/m ² , special paper) Output tray 3 (Relay Unit top surface) 100 sheets (52 to 90 g/m ²) 20 sheets (91 to 300 g/m ² , special paper)
Staple Capacity	50 sheets (Plain Paper 52 to 90 g/m ²) 30 sheets (Thick paper 91 to 120 g/m ²) 15 sheets (Thick paper 121 to 209 g/m ²)
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	56 W or less
Dimensions [W] x [D] x [H]	528 x 641 x 1,023 mm (20-3/4" x 25-1/4" x 40-1/4")
Weight	Approx. 40 kg (88-1/4 lb)

¹ S: Short edge feed Set by Customer engineer

Saddle Sticher SD-511 (Optional)



Applicable	Finisher FS-534
Support Paper Type	Centre Staple: 52 to 90 g/m ² Half-Fold: 52 to 209 g/m ² (more than 91 g/m ² Thick paper can be used only as a cover page) Tri-Fold: 52 to 90 g/m ²
Support Paper Size	Centre Staple and Fold, Half-Fold: A3 Wide, A3, B4, A4S ¹ , 12-1/4" x 18", 11" x 17", 8-1/2" x 14", 8-1/2" x 11", 8K Tri-Fold: A4S ¹ , 8-1/2" x 11S ¹ , 16KS ¹
Maximum Number of Sheets that can be Centrestapled	20 (52 to 90 g/m ²) sheets, or 19 (90 g/m ²) sheets + Thick (209 g/m ²) 1 sheet
Maximum Number of Folded Sheets	Half-Fold: 5 sheets or Thick paper (91 to 209g/m ²) 1 sheet, Tri-Fold: 3 sheets
Stacking Capacity	1 to 3 sheets: 20 sets, 4 to 10 sheets: 10 sets 11 to 20 sheets: 5 sets Tri-Fold (1 sheet): 30 sets, Tri-Fold (2-3 sheets): 10 sets
Power Requirements	Supplied from Finisher FS-534
Dimensions [W] x [D] x [H]	210 x 556 x 547mm (8-1/2" x 21-3/4" x 21-1/2")
Weight	Approx. 24 kg (53 lb)

¹ S: Short edge feed


Punch Kit PK-520 (Optional)



Applicable	Finisher FS-534
Number of holes	2 holes or 4 holes
Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90g/m ²), Thick paper (91 to 300 g/m ²)
Support Paper Size	A3, B4, A4, B5, Foolscap ¹ (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K
Power Requirements	Supplied from Finisher FS-534
Dimensions [W] x [D] x [H]	61 x 492 x 142 mm (2-1/2" x 19-1/2" x 5-1/2")
Weight	Approx. 2 kg (4-1/2 lb)

¹ Set by Customer engineer

Large Capacity Unit LU-301 (Optional)



Support Paper Type (Weight)	Approx. 2 kg (4-1/2 lb)
Support Paper Size	A4 Crosswise, 8-1/2" x 11" Crosswise
Paper Capacity	Plain paper: 3,000 sheets (80 g/m ²) / 3,300 sheets (60 g/m ²) Thick paper 1: 2,500 sheets, Thick paper 1+: 1,750 sheets, Thick paper 2: 1,550 sheets, Thick paper 3: 1,300 sheets
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	22 W or less
Dimensions [W] x [D] x [H]	367 x 528 x 405 mm (14-1/2" x 20-3/4" x 16")
Weight	Approx. 18 kg (39-3/4 lb)

* Thick paper 1: 91 to 120 g/m², Thick paper 1+: 121 to 157 g/m², Thick paper 2: 158 to 209 g/m², Thick paper3: 210 to 256 g/m²

Large Capacity Unit LU-204 (Optional)



Support Paper Type (Weight)	Thin paper/Plain paper (52 to 90 g/m ²), Thick paper (91 to 256 g/m ²)
Support Paper Size ¹	SRA3 to A4, 12" x 18" to 8-1/2" x 11"
Paper Capacity	Plain paper: 2,500 sheets (80 g/m ²) / 2,750 sheets (60 g/m ²) Thick paper 1: 2,000 sheets, Thick paper 1+: 1,450 sheets, Thick paper 2: 1,250 sheets, Thick paper 3: 1,000 sheets
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	22 W or less
Dimensions [W] x [D] x [H]	629 x 556 x 405 mm (24-3/4" x 22" x 16")
Weight	Approx. 25 kg (55 lb)

¹ The maximum number of loadable sheets for each paper size is 2,500 sheets (for 80 g/m²) or 2,750 sheets (for 60 g/m²).

* Thick paper 1: 91 to 120 g/m², Thick paper 1+: 121 to 157 g/m², Thick paper 2: 158 to 209 g/m², Thick paper3: 210 to 256 g/m²



FOR THE EARTH. FOR THE FUTURE.

Regional Headquarters

Konica Minolta Business Solutions Asia Pte Ltd.

30 Pasir Panjang Road, #06-32

Mapletree Business City

Singapore 117440

Tel: +65 6361 2800

Fax: +65 6361 2888

Email: enquiry@konicaminolta.com

www.konicaminolta.asia/business

Presence in the region

Bangladesh . Bhutan . Brunei . Cambodia . Indonesia . Laos . Malaysia . Mauritius . Myanmar . Philippines . Singapore . Sri Lanka . Thailand . Vietnam

Konica Minolta Business Solutions Asia

Konica Minolta Business Solutions, a leading company in advanced document management technologies and solutions for the desktop to the print shop, brings together unparalleled advances in security, print quality and network integration via its award-winning line of bizhub® multi-function products (MFPs); bizhub PRESS® and bizhub PRO® production print systems; magicolor® color printers; and pagepro® monochrome printers. Konica Minolta also offers software solutions and optimised print services to reduce document output cost, improve productivity and optimise office environment, backed by impeccable service and support team.

Konica Minolta adopts a proactive effort in reducing global environmental impact through its green product lifecycle. In line with its core message "Giving Shape to Ideas," Konica Minolta endeavours to respond to its customers' needs across the world with relentless creativity, innovation and advance technology.

Konica Minolta is a registered trademark of Konica Minolta, Inc. bizhub is a registered trademark of Konica Minolta Business Technologies, Inc. All other trademarks mentioned in this document are the property of their respective owners.